

Launch Complex 40 (SLC-40) at Cape Canaveral Space Force Station in Florida. Liftoff is targeted for 6:40 p.m. ET, with backup opportunities available until 10:40 p.m. ET. If needed, additional opportunities are also available on Friday, April 19 starting at 6:18 p.m. ET. A live webcast of this mission will begin on **X @SpaceX** about five minutes prior to liftoff. **Watch live**.


SpaceX is targeting Thursday, April 18 for a Falcon 9 launch of 23 Starlink satellites to low-Earth orbit from Space

This is the seventh flight for the first stage booster supporting this mission, which previously launched ESA Euclid,

Ax-2, Ax-3, CRS-30, and two Starlink missions. Following stage separation, the first stage will land on the A Shortfall of Gravitas droneship, which will be stationed in the Atlantic Ocean.

COUNTDOWN

HR/MIN/SEC	EVENT
00:38:00	SpaceX Launch Director verifies go for propellant load
00:35:00	RP-1 (rocket grade kerosene) loading begins
00:35:00	1st stage LOX (liquid oxygen) loading begins
00:16:00	2nd stage LOX loading begins
00:07:00	Falcon 9 begins engine chill prior to launch
00:01:00	Command flight computer to begin final prelaunch checks
00:01:00	Propellant tank pressurization to flight pressure begins
00:00:45	SpaceX Launch Director verifies go for launch
00:00:03	Engine controller commands engine ignition sequence to start
00:00:00	Falcon 9 liftoff

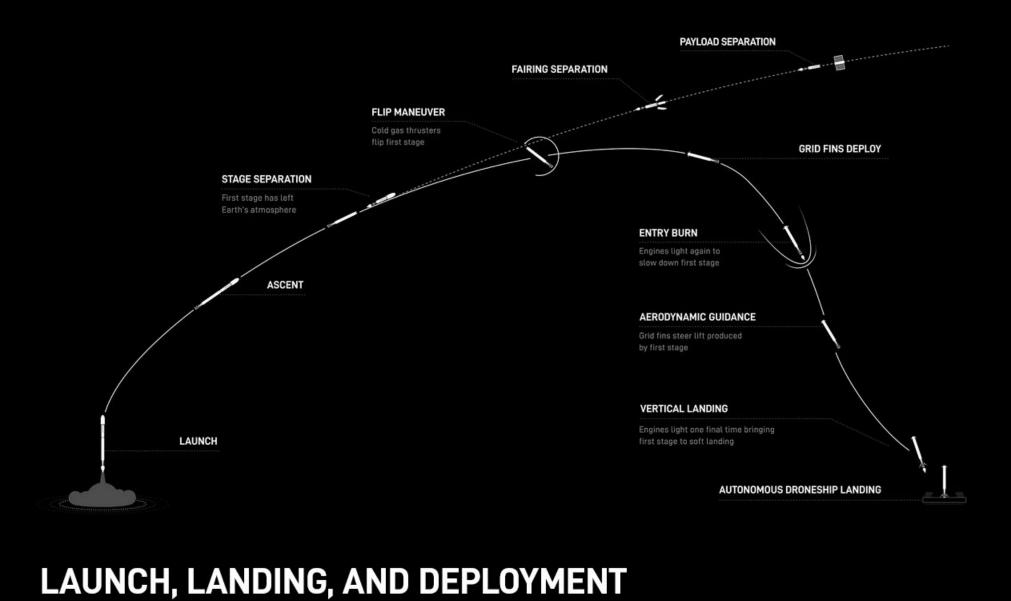

HR/MIN/SEC	

All times are approximate		
HR/MIN/SEC	EVENT	
00:01:12	Max Q (Moment of peak mechanical stress on the rocket)	
00:02:30	1st stage main engine cutoff (MECO)	
00:02:34	1st and 2nd stages separate	
00:02:41	2nd stage engine starts (SES-1)	
00:03:08	Fairing deployment	
00:06:10	1st stage entry burn begins	
00:06:31	1st stage entry burn ends	
00:07:57	1st stage landing burn begins	
00:08:18	1st stage landing	
00:08:44	2nd stage engine cutoff (SECO-1)	
00:54:01	2nd stage engine starts (SES-2)	
00:54:03	2nd stage engine cutoff (SECO-2)	
01:05:10	Starlink satellites deploy	