

UPCOMING LAUNCH

STARLINK MISSION

WATCH


SpaceX is targeting Sunday, June 22 for a Falcon 9 launch of 27 [Starlink](#) satellites to low-Earth orbit from Space Launch Complex 40 (SLC-40) at Cape Canaveral Space Force Station in Florida. Liftoff is targeted for 1:47 a.m. ET, with backup opportunities available until 5:47 a.m. ET. If needed, additional opportunities are also available on Monday, June 23 starting at 1:25 a.m. ET.

A live webcast of this mission will begin about five minutes prior to liftoff, which you can watch here and on [X @SpaceX](#). You can also watch the webcast on the new X TV app.

This is the 25th flight for the first stage booster supporting this mission, which previously launched CRS-24, Eutelsat HOTBIRD 13F, OneWeb 1, SES-18 and SES-19, and 20 Starlink mission. Following stage separation, the first stage will land on the A Shortfall of Gravitas droneship, which will be stationed in the Atlantic Ocean.

COUNTDOWN

HR/MIN/SEC	EVENT
00:38:00	SpaceX Launch Director verifies go for propellant load
00:35:00	RP-1 (rocket grade kerosene) loading begins
00:35:00	1st stage LOX (liquid oxygen) loading begins
00:16:00	2nd stage LOX loading begins
00:07:00	Falcon 9 begins engine chill prior to launch
00:01:00	Command flight computer to begin final prelaunch checks
00:01:00	Propellant tank pressurization to flight pressure begins
00:00:45	SpaceX Launch Director verifies go for launch
00:00:03	Engine controller commands engine ignition sequence to start
00:00:00	Falcon 9 liftoff

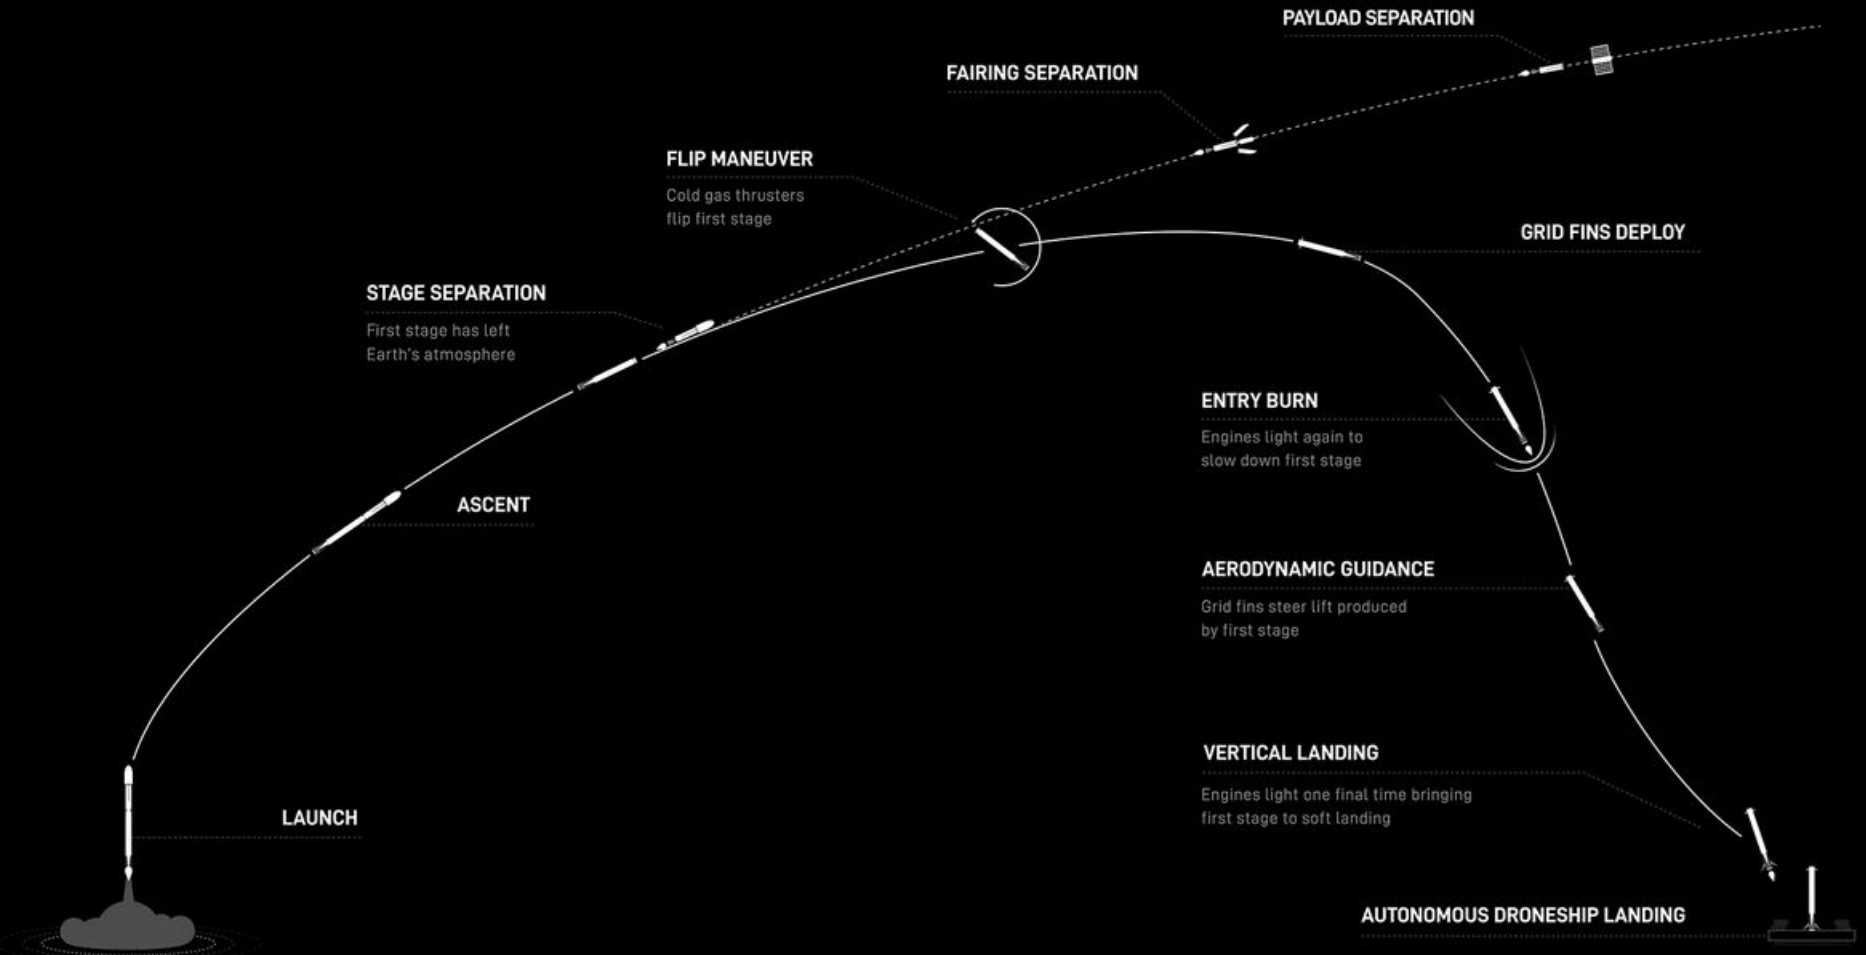

LAUNCH, LANDING, AND DEPLOYMENT

All Times Approximate

HR/MIN/SEC	EVENT
00:01:09	Max Q (Moment of peak mechanical stress on the rocket)
00:02:25	1st stage main engine cutoff (MECO)
00:02:28	1st and 2nd stages separate
00:02:35	2nd stage engine starts (SES-1)
00:02:53	Fairing separation
00:06:07	1st stage entry burn begins
00:06:31	1st stage entry burn ends
00:07:52	1st stage landing burn begins
00:08:16	1st stage landing
00:08:37	2nd stage engine cutoff (SECO-1)
00:54:55	2nd stage engine starts (SES-2)
00:54:57	2nd stage engine cutoff (SECO-2)
01:04:19	Starlink satellites deploy