

UPCOMING LAUNCH

STARLINK MISSION

WATCH


SpaceX is targeting Monday, November 25 for a Falcon 9 launch of 23 **Starlink** satellites, including 12 with **Direct to Cell** capabilities, to low-Earth orbit from Space Launch Complex 40 (SLC-40) at Cape Canaveral Space Force Station in Florida. Liftoff is targeted for 4:35 a.m. ET, with backup opportunities available until 8:14 a.m. ET. If needed, additional opportunities are also available on Tuesday, November 26, starting at 4:26 a.m. ET.

A live webcast of this mission will begin about five minutes prior to liftoff, which you can watch here and on **X @SpaceX**. You can also watch the webcast on the new X TV app.

This is the 13th flight for the first stage booster supporting this mission, which previously launched Euclid, Axiom-2, Axiom-3, Cygnus NG-21, SES 24, CRS-30, and six Starlink missions. Following stage separation, the first stage will land on the Just Read the Instructions dronship, which will be stationed in the Atlantic Ocean.

COUNTDOWN

HR/MIN/SEC	EVENT
00:38:00	SpaceX Launch Director verifies go for propellant load
00:35:00	RP-1 (rocket grade kerosene) loading begins
00:35:00	1st stage LOX (liquid oxygen) loading begins
00:16:00	2nd stage LOX loading begins
00:07:00	Falcon 9 begins engine chill prior to launch
00:01:00	Command flight computer to begin final prelaunch checks
00:01:00	Propellant tank pressurization to flight pressure begins
00:00:45	SpaceX Launch Director verifies go for launch
00:00:03	Engine controller commands engine ignition sequence to start
00:00:00	Falcon 9 liftoff

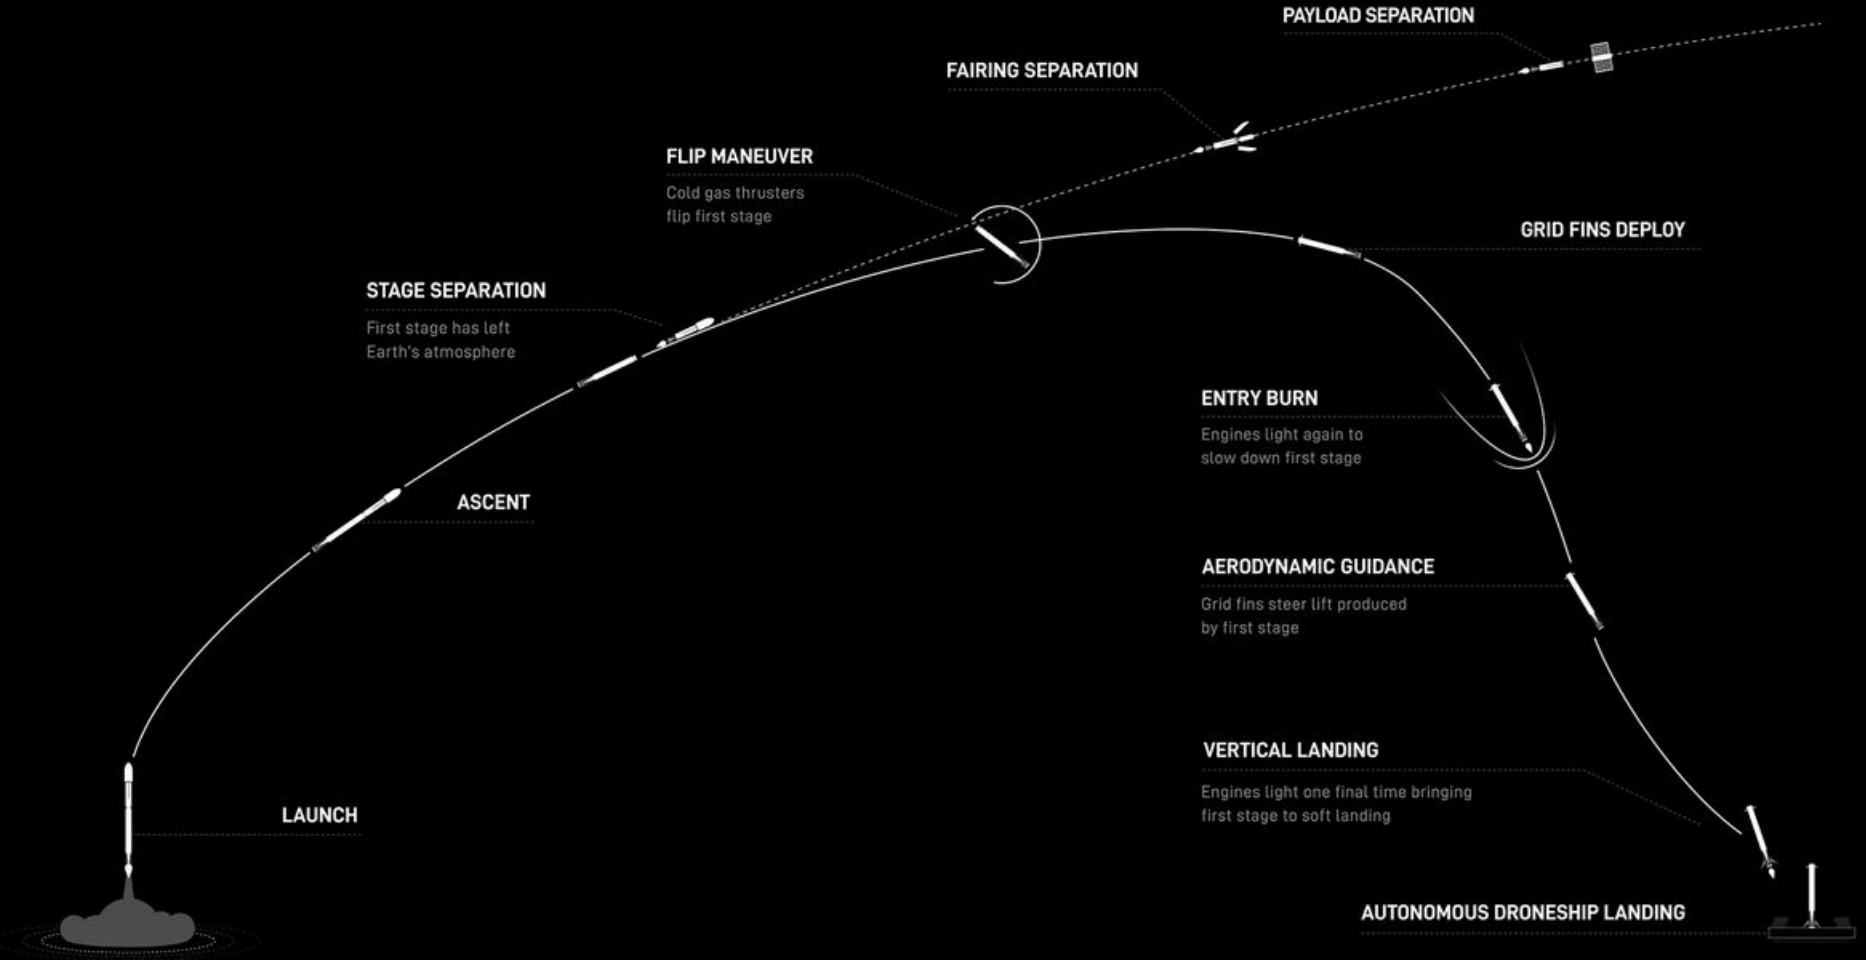

LAUNCH, LANDING, AND DEPLOYMENT

All Times Approximate

HR/MIN/SEC	EVENT
00:01:11	Max Q (Moment of peak mechanical stress on the rocket)
00:02:26	1st stage main engine cutoff (MECO)
00:02:30	1st and 2nd stages separate
00:02:37	2nd stage engine starts (SES-1)
00:03:06	Fairing deployment
00:06:02	1st stage entry burn begins
00:06:27	1st stage entry burn ends
00:07:49	1st stage landing burn begins
00:08:11	1st stage landing
00:08:40	2nd stage engine cutoff (SECO-1)
00:54:10	2nd stage engine starts (SES-2)
00:54:12	2nd stage engine cutoff (SECO-2)
01:05:19	Starlink satellites deploy