

# WGS-4

ENHANCING COMMUNICATION CAPABILITIES FOR THE WARFIGHTER • DELTA IV



## MISSION OVERVIEW | SLC-37 CCAFS, FL





United Launch Alliance (ULA) is proud to be a part of the WGS-4 mission with the U.S. Air Force Space Command's Space and Missile Systems Center (AFSPC/SMC). The WGS-4 mission marks the 18<sup>th</sup> Delta IV launch and the second launch of the Delta IV Medium+ (5,4) launch vehicle configuration.

The WGS mission is the fourth installment of the Wideband Global SATCOM (WGS) system. The WGS satellites are an important element of a new high-capacity satellite communications system providing enhanced communications capabilities to our troops in the field for the next decade and beyond. WGS enables more robust and flexible execution of Command and Control, Communications, Computers, Intelligence, Surveillance and Reconnaissance (C4ISR), as well as battle management and combat support information functions. WGS-4 augments the existing service available through the UHF Follow-on, WGS-1, WGS-2 and WGS-3 satellites by providing enhanced information broadcast capabilities.

The ULA team is focused on attaining Perfect Product Delivery for the WGS-4 mission, which includes a relentless focus on mission success (the perfect product) and also excellence and continuous improvement in meeting all of the needs of our customers (the perfect delivery).

My thanks to the entire ULA team for its dedication in bringing WGS-4 to launch, and to the AFSPC/SMC for selecting Delta for this important mission.

Go Delta, Go WGS!

**Jim Spornick**  
Vice President,  
Mission Operations



# Delta IV WGS-4

## WGS-4 SATELLITE | Overview

The WGS-4 satellite is an approximately 13,200-lb communications satellite. WGS supports communications links in the 500 MHz range of the X-band and 1 GHz range of the Ka-band spectra. WGS can filter and route up to 4.875 GHz of instantaneous bandwidth. WGS-4, the first Block II satellite, includes a high-bandwidth RF bypass capability in addition to the previous capabilities provided by the Block I satellites. Depending on the mix of ground terminals, data rates, and modulation schemes employed, a WGS satellite can support data transmission rates between 2.4 and 3.6 Gbps.

WGS has 19 independent coverage areas that can be positioned throughout its field of view. This includes eight steerable/shapeable X-band beams formed by separate transmit/receive phased arrays; 10 Ka-band beams served by independently steerable diplexed antennas (three with selectable RF polarization); and transmit/receive X-band Earth-coverage beams. WGS can tailor coverage areas and connect X-band and Ka-band users anywhere within its field of view.

Four Army Wideband Satellite Operations Centers (WSOC) provide command and control of WGS. Each Global SATCOM Configuration and Control Element (GSCCE) has the capability to control up to three satellites at a time, using X-band or Ka-band telemetry and command links. Spacecraft platform control is accomplished by the 3<sup>rd</sup> Space Operations Squadron at Schriever Air Force Base in Colorado Springs, CO, using WGS mission-unique software and databases.

Support technologies for WGS include the xenon-ion propulsion system (XIPS), which is 10 times more efficient than conventional bipropellant systems, highly efficient triple-junction gallium arsenide solar cells, and deployable radiators with flexible heat pipes. Four 25-cm XIPS thrusters remove orbit eccentricity during transfer orbit operations. The thrusters also used to perform orbit maintenance and any required station-change maneuvers during the mission's life. The triple-junction gallium arsenide solar cells provide on-orbit electrical power for the spacecraft. The deployable radiators' flexible heat pipes provide increased radiator area, resulting in a cooler, more stable thermal environment for the spacecraft.



Image Courtesy of Boeing

## DELTA IV MEDIUM+ (5,4) LAUNCH VEHICLE | Overview


The Delta IV M+ (5,4) consists of a single Delta IV common booster core (CBC), the Delta cryogenic second stage (DCSS), four solid rocket motors (SRM) and a 5-m diameter payload fairing. The CBC and the DCSS are connected by a composite cylindrical interstage adapter (ISA). The SRMs are connected to the booster by two ball-and-socket joints and four structural thrusters.

The SRMs are approximately 60 in. in diameter and 53 ft long, and are constructed of a graphite-epoxy composite. Their throttle profile is designed into their propellant grain. Two of the SRMs have thrust vector control capabilities. The SRMs burn for approximately 94 seconds and are jettisoned at roughly 100 seconds into the flight.

The Delta IV booster tanks are structurally rigid, and constructed of isogrid aluminum barrels, spun-formed aluminum domes, machined aluminum tank skirts, and a composite centerbody. Delta IV booster propulsion is provided by the RS-68 engine system. The RS-68 burns cryogenic liquid hydrogen and liquid oxygen, and delivers 663,000 lb of thrust at sea level. The booster's cryogenic tanks are insulated with a combination of spray-on and bond-on insulation, and helium-purged insulation blankets. The Delta IV booster is controlled by the DCSS avionics system, which provides guidance, flight control, and vehicle sequencing functions during CBC and DCSS phases of flight. The boost phase of flight ends 6 seconds after main engine cutoff (MECO), when the separation charge in the interstage adapter is fired and 16 pneumatic actuators push the spent Delta IV CBC stage and the DCSS apart.

The DCSS stage propellant tanks are structurally rigid and constructed of isogrid aluminum ring forgings, spun-formed aluminum domes, machined aluminum tank skirts and a composite intertank truss. The DCSS is also a cryogenic liquid hydrogen/liquid oxygen-fueled vehicle. It uses a single RL10B-2 engine that produces 24,750 lb of thrust. Like the CBC, the DCSS cryogenic tanks are insulated with a combination of spray-on and bond-on insulation, and helium-purged insulation blankets. An equipment shelf attached to the aft dome of the DCSS liquid oxygen tank provides the structural mountings for vehicle electronics. The structural and electronic interfaces with the spacecraft (SC) are provided by the payload attach fitting (PAF). The WGS-4 mission uses a 5-m diameter payload fairing (PLF). The PLF is a composite bisector (two-piece shell) fairing. The vehicle's height, with the 47-ft tall PLF, is approximately 217 ft, 7 in.

## DELTA IV MEDIUM+ (5,4) LAUNCH VEHICLE | Expanded View

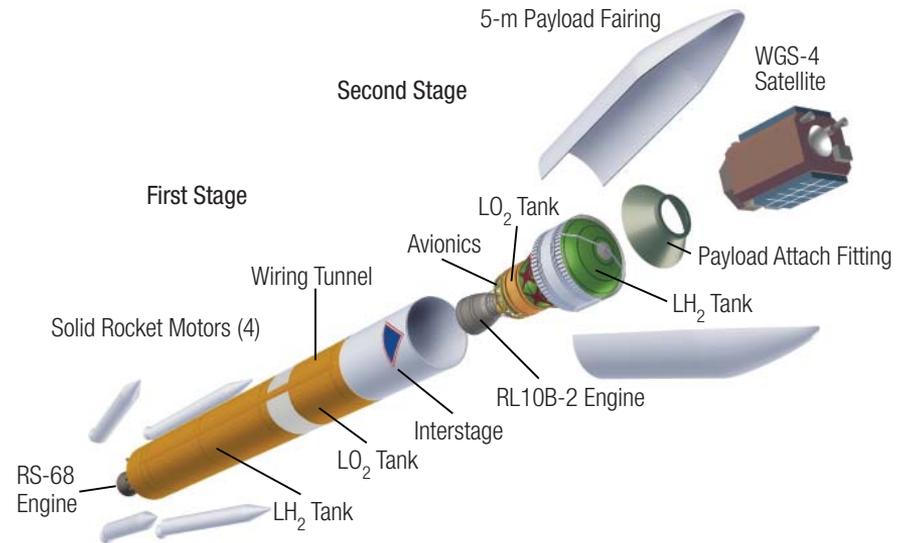

## SLC-37 | Overview

- 1 Mobile Service Tower (MST)
- 2 Launch Vehicle
- 3 Launch Table
- 4 Fixed Umbilical Tower (FUT)
- 5 Lightning Protection Towers
- 6 LH<sub>2</sub> Storage Tank
- 7 LO<sub>2</sub> Storage Tank



## DELTA IV WGS-4 | Mission Overview

The WGS-4 mission will be flown from Space Launch Complex 37 (SLC-37) at Cape Canaveral Air Force Station (CCAFS), FL on a Delta IV Medium+ (5,4) vehicle.

The two-burn mission will fly an easterly trajectory from SLC-37 with an approximately 101-degree flight azimuth. The separation event will release the WGS-4 satellite into a supersynchronous transfer orbit with a 237-nautical mile (nmi) perigee, an apogee radius of approximately 36,108 nmi, and an approximately 24° inclination.

Launch begins with RS-68 engine ignition approximately 5.5 seconds before liftoff (T-5.5 seconds). SRM ignition takes place at T-0.02 seconds after telemetry indication of healthy RS-68 startup.

Liftoff occurs at T+0.0 seconds. Shortly after the vehicle clears the pad, it performs its pitch/yaw/roll program. Maximum dynamic pressure occurs approximately 50 seconds into flight.

The SRMs burn out at approximately T+94 seconds, and are jettisoned in pairs at T+100 and 103 seconds. Payload fairing jettison takes place at approximately 207 seconds; about 40 seconds prior to main engine cutoff (MECO). MECO occurs at approximately 247 seconds.


DCSS separation is about 6 seconds after MECO. DCSS main engine start occurs 13 seconds after the separation event. At approximately 20 minutes into the mission, the first second stage engine cutoff (SECO-1) occurs and DCSS has achieved its parking orbit.

After an 8-minute coast phase, DCSS reorients itself for restart. Restart ignition takes place approximately 28 minutes into the mission and lasts about 3 minutes. After SECO-2, DCSS reorients its attitude for the separation event. The WGS-4 spacecraft separates about 41 minutes after launch. The turn to Collision and Contamination Avoidance Maneuver (CCAM) attitude begins about 3 minutes after the separation event. The DCSS mission ends 79 minutes after launch after blowdown of the propellant tanks and burn off of residual hydrazine.

# Delta IV WGS-4



## FLIGHT PROFILE | Liftoff to Spacecraft Separation

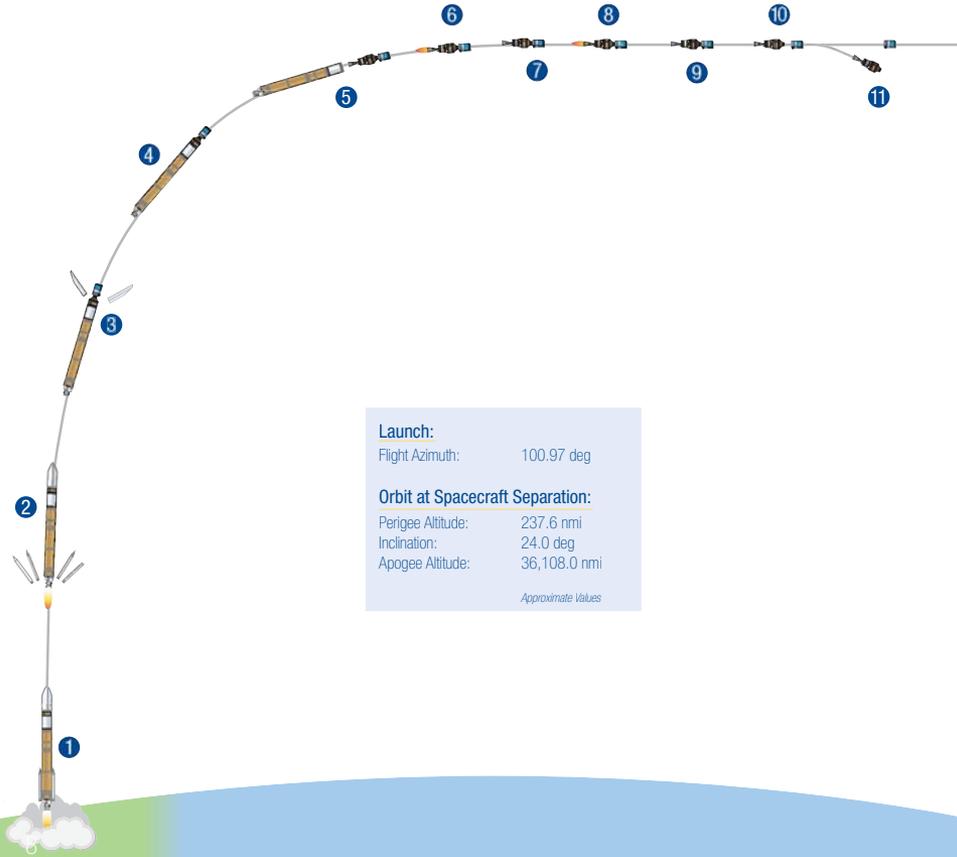

**Launch:**  
Flight Azimuth: 100.97 deg

**Orbit at Spacecraft Separation:**  
Perigee Altitude: 237.6 nmi  
Inclination: 24.0 deg  
Apogee Altitude: 36,108.0 nmi

*Approximate Values*

## SEQUENCE OF EVENTS | Liftoff to Spacecraft Separation


	Event	Time (seconds)	Time (hr:min:sec)
1	Liftoff	0.0	00:00:00.0
	Begin Pitch/Yaw Maneuver	7.0	00:00:07.0
	Mach 1.05	36.2	00:00:36.2
	Maximum Dynamic Pressure	50.1	00:00:50.1
2	SRM Burnout - Fixed Nozzle	93.1	00:01:33.1
	SRM Burnout - TVC Nozzle	93.3	00:01:33.3
	SRM Jettison - Fixed Nozzle	100.0	00:01:40.0
	SRM Jettison - TVC Nozzle	102.35	00:01:42.4
3	Payload Fairing Jettison	207.0	00:03:27.0
4	MECO	246.9	00:04:06.9
5	First-Stage Separation	254.0	00:04:14.0
6	Second-Stage Ignition	267.0	00:04:27.0
7	First Cutoff - Second Stage (SECO-1)	1,242.9	00:20:42.9
8	First Restart - Second Stage	1,707.5	00:28:27.5
9	Second Cutoff - Second Stage (SECO-2)	1,895.8	00:31:35.8
10	Spacecraft Separation	2,442.0	00:40:42.0
11	End Evasive Maneuver (CCAM)	2,850.0	00:47:30.0

# Delta IV WGS-4


## DELTA IV PRODUCTION & LAUNCH | Overview



## DELTA IV PROCESSING | Cape Canaveral

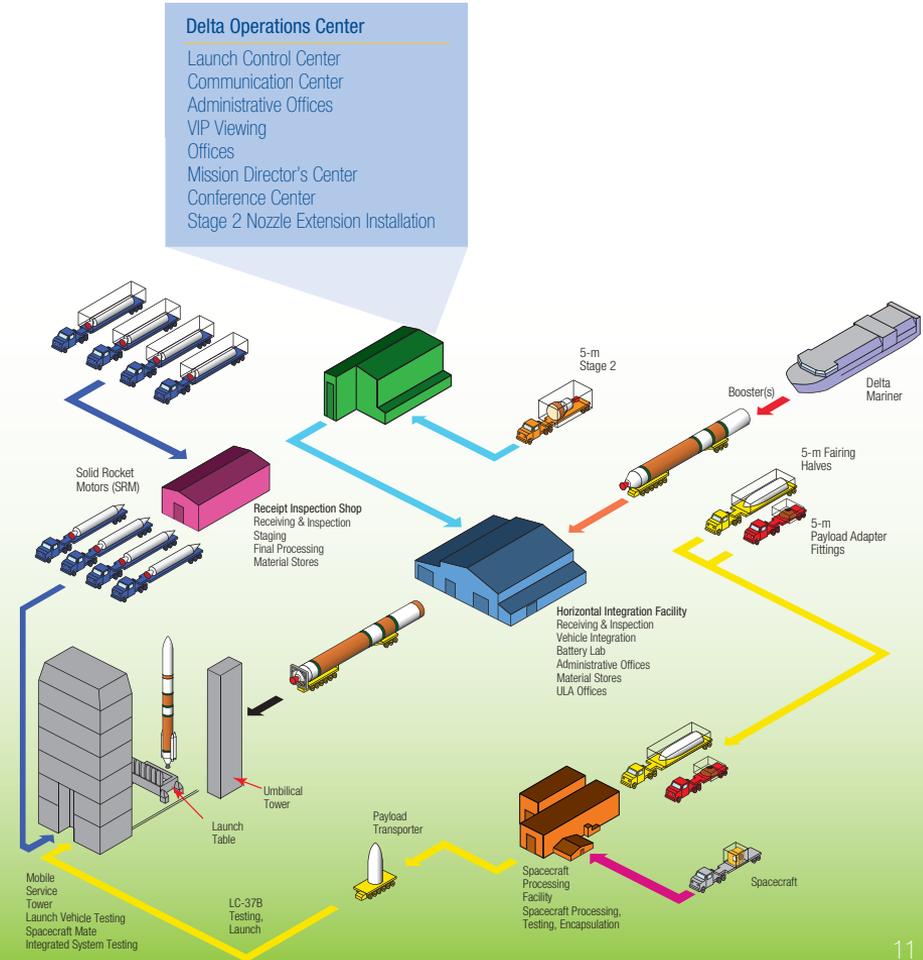


## GROUND TRACE | Liftoff to Spacecraft Separation

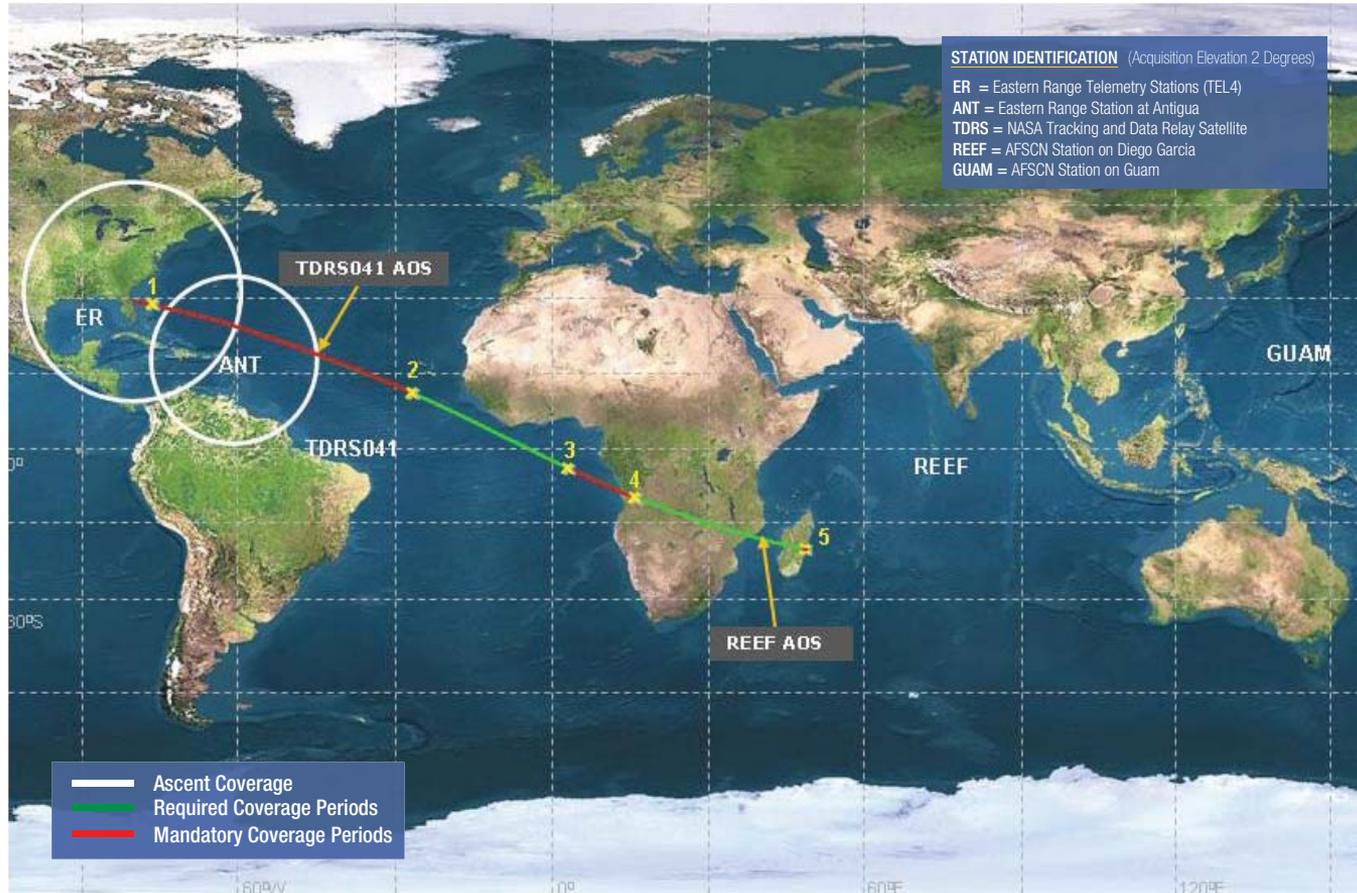


1 = MECO (00:04:07) | 2 = SECO-1 (00:20:43) | 3 = 1st Restart — 2nd Stage (00:28:28) | 4 = SECO-2 (00:31:36) | 5 = S/C Sep (00:40:42)

# Delta IV WGS-4




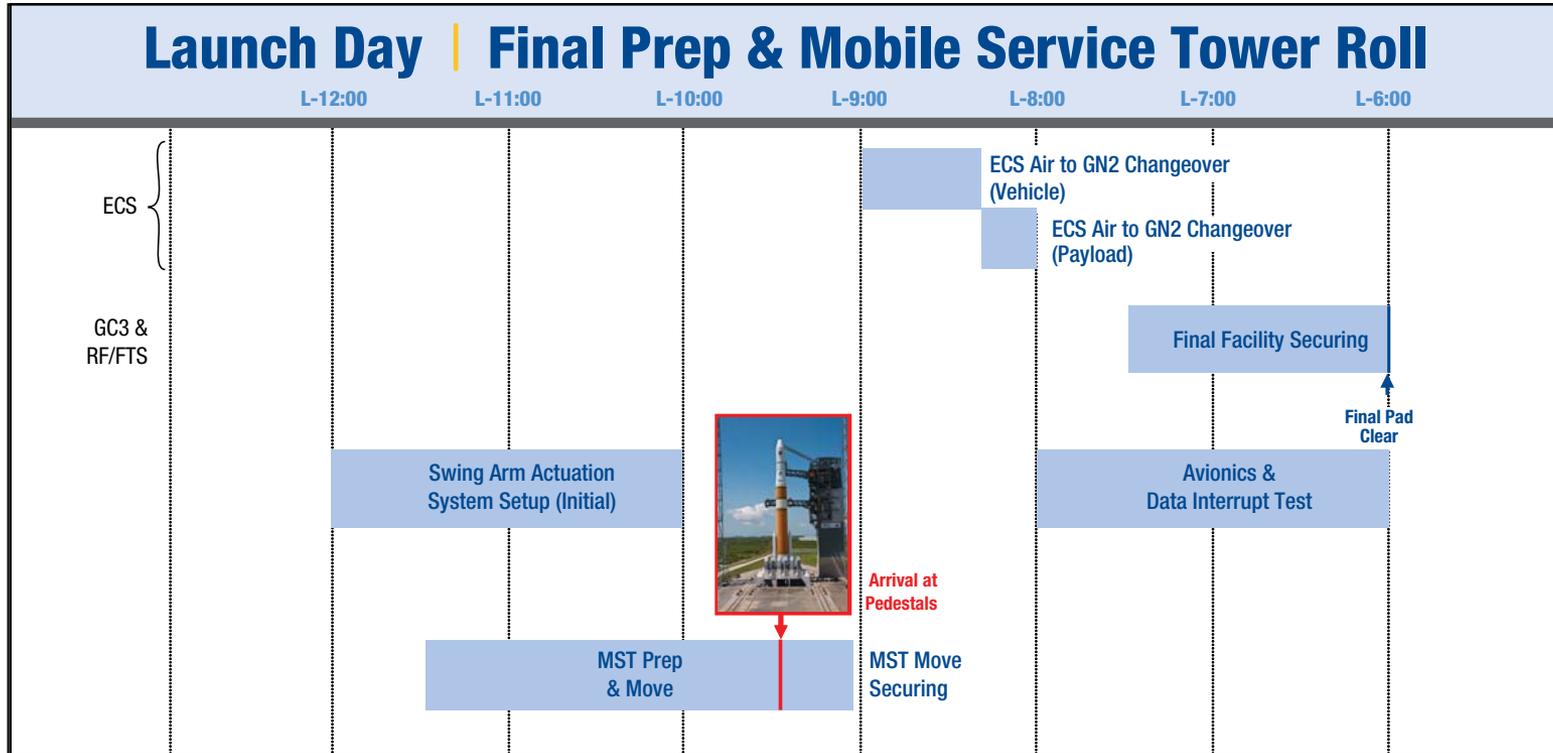

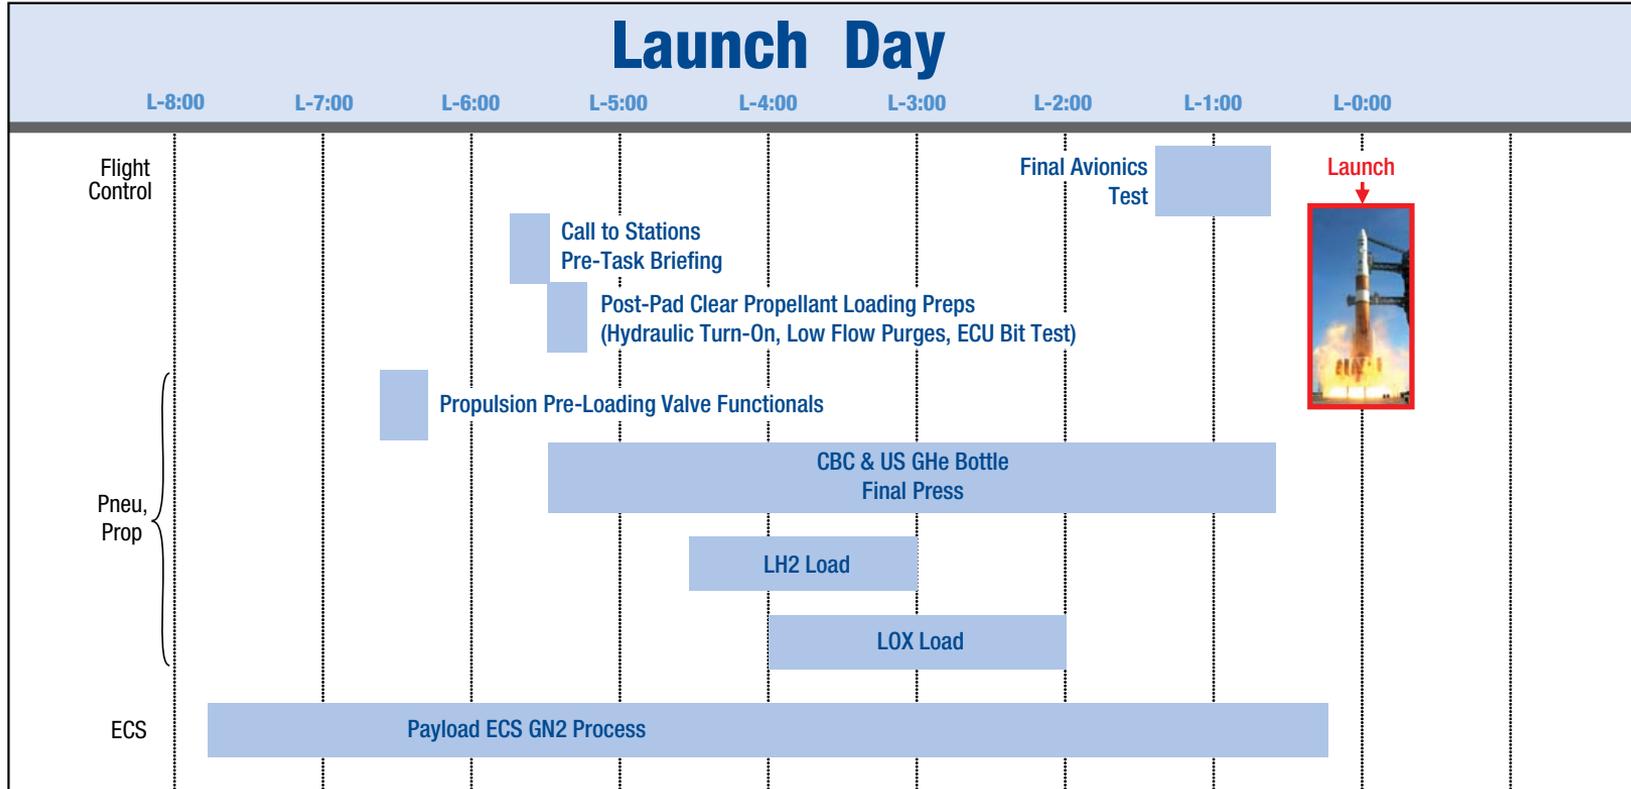

# WGS-4

ENHANCING COMMUNICATION CAPABILITIES FOR THE WARFIGHTER • DELTA IV

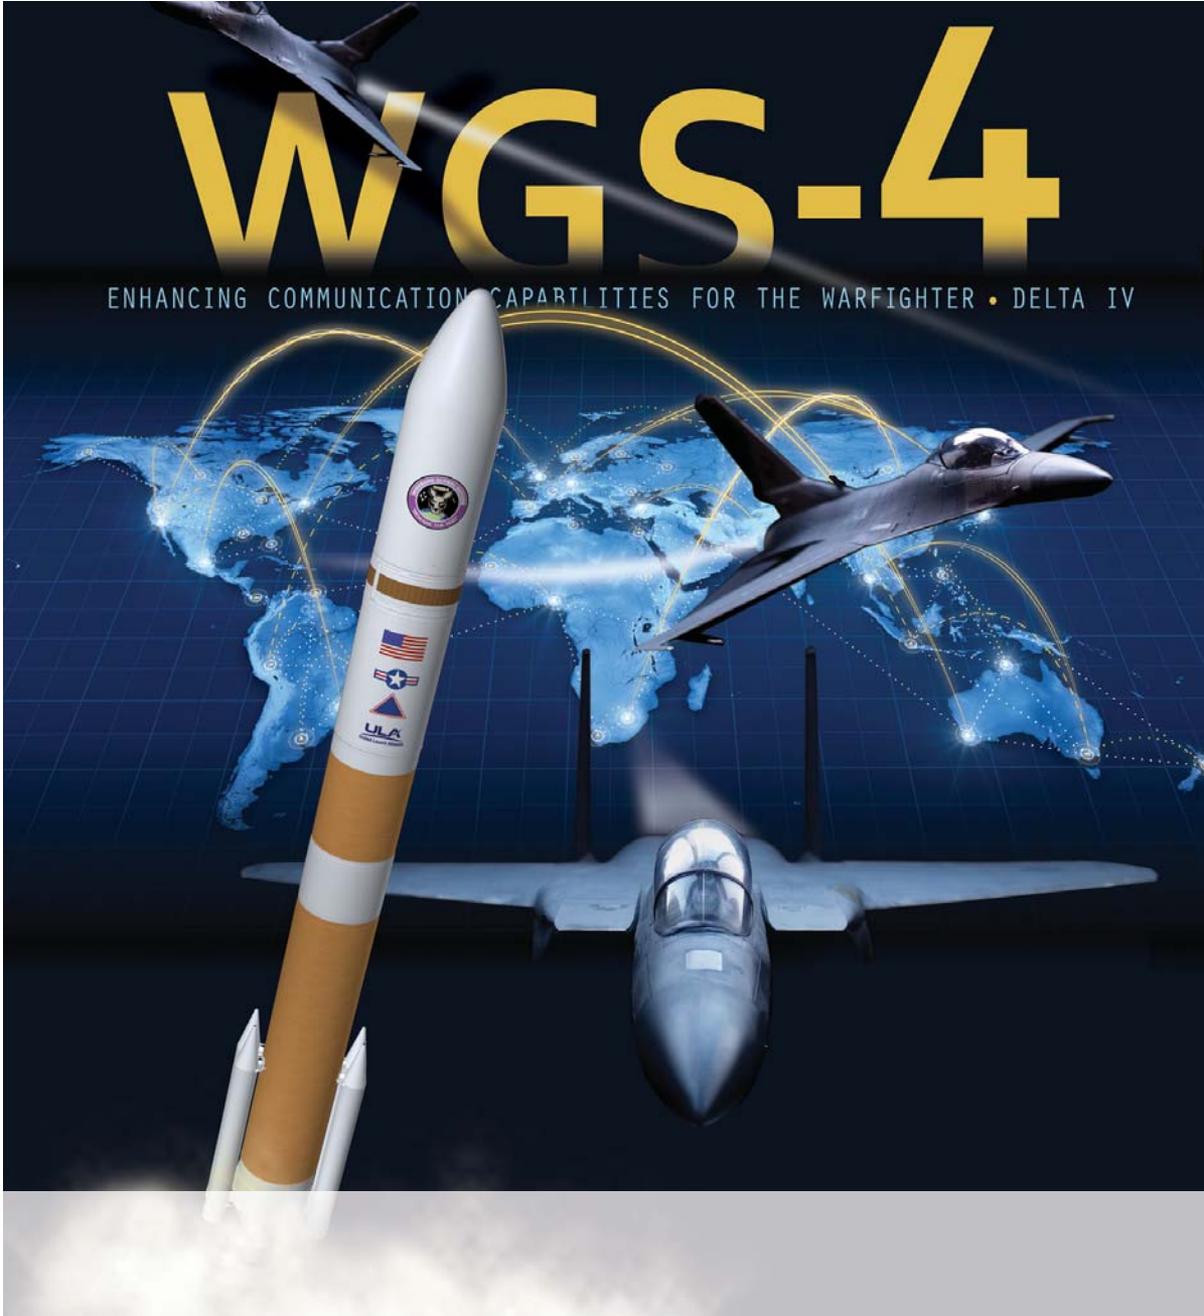

United Launch Alliance | P.O. Box 3788 Centennial, CO 80155 | [www.ulalaunch.com](http://www.ulalaunch.com)